


CLEAVAGE STRENGTH OF METAL TO METAL ADHESIVE BONDS

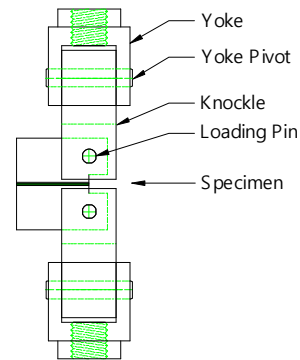

Model No.
ASTM.D1062.10

Specimen Size or Difference Between Fixtures
1" wide, 5/8" thick and 1.25" length

Construction
Stainless steel

Temperature
-240 to 600°F (-152 to 318°C)

Fixture:	Mounting	1/2"-20 threaded couplings
	Capacity	1,000 lbs
	Weight	6 lbs
	Dimensions	2" x 1" x 8" approximately
	Standard	Manufactured in compliance with ASTM D1062

QUOTE

Model No. ASTM.D1062.10 - Cleavage Strength Test Fixture with Five Sets of Bonding Blocks.

Universal joint type fixture. Constructed from stainless steel except for the five sets of bonding blocks which are constructed from aluminum with a protective black anodized finish. The fixture comes with 1/2"-20 threaded couplings and can handle 1,000 lbs capacity. The fixture is manufactured in compliance with ASTM D1062.

ACCESSORIES

There are no accessories available for this fixture

SPARE PARTS

Model No. SPA.D1062.1001 - Extra Set of (2) Aluminum Bonding Blocks

COMMON SIZE ADAPTERS

Upper and Lower Mounting: 1/2"-20 Female Coupling

Model No. M03S21 - 1.25" Male Clevis to 1/2"-20 Threaded Stud

Model No. S42S21 - 1.25" -12 to 1/2"-20 Threaded Step Stud

Model No. S48S21 - 1.5" -12 to 1/2"-20 Threaded Step Stud

Model No. S60S21 - 2" -12 to 1/2"-20 Threaded Step Stud

Model No. LN21 - 1/2"-20 Threaded Locking Nut with Knurled OD