
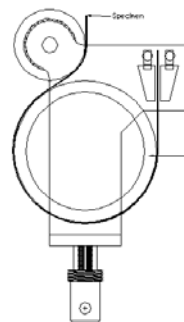


9" WIDE DOUBLE WEDGE GRIP SET (CS) NON DRUM TYPE

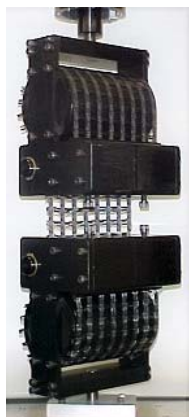

Specimen:	Width	9.0"
	Thickness	Up to 1/2"
Fixture:	Construction	High strength steel with protective finish
	Temperature	-120 to 250 °F (-85 to 122°C)
	Mounting	1"-14 threaded coupling
	Capacity	20,000 lbs (44.5 kN)
	Weight	260 lbs
	Dimensions	11 x 8" x 26.5"
	Standard	Manufactured in accordance with ASTM D4595, D4884, D4885, and D5262

Model No. ASTM.D4884.10 - 9" Wide Wedge Action Geotextile Grips (Double movable face)

Two piece grip set with double moving wedge faces. The wedge faces are serrated with with 25 teeth per inch at a depth of 0.030" The grip sets are supplied with one set of wedge inserts (ie. 0.00" to 0.13") for different thickness specimens. The grip is tightened by 2 clamping bolts that move the grip faces. The grip set is constructed from high strength heat treated steel with a protective black oxide finish in accordance with ASTM D4595, D4884, and D4885.

MODEL NO. ASTM.D4884.10

ASTM, SEWN, THERMALLY, BONDED, SEAMS,

ACCESSORIES

ACC.D4884.1001 - Replaceable Double Movable face Set of (4) for specimen thickness of 0.13" to 0.25"

Upper and lower fixture attachment is supplied with 1" -14 female coupling. (Common adapter sizes include:)

Model No. M03S36 - 1.25" Male Clevis (Type D) to 1" -14 Threaded Stud

Model No. S42S36 - 1.25" -12 to 1" -14 Threaded Step Stud

Model No. S48S36 - 1.5" -12 to 1" -14 Threaded Step Stud

Model No. S60S36 - 2" -12 to 1" -14 Threaded Step Stud

Model No. LN36 - 1" -14 Threaded Locking Nut with Knurled OD

SPARE PARTS

SPA.D4884.1001 - Replaceable Double Movable face Set of (4) for specimen thickness of 0 to 0.13"

REFERENCE DOCUMENT AND TEST METHOD SCOPE:

<http://www.astm.org/Standards/D4884.htm>

ASTM D4884 / D4884M - 14a

Standard Test Method for Strength of Sewn or Bonded Seams of Geotextiles

1.1 This test method covers the determination of the seam strength of geotextiles, using a wide specimen.

1.2 The long term performance of a seaming technique is not addressed by this test method. This test method will provide data to indicate the short term seam strength that can be achieved for each particular geotextile and seam assembly construction. To assess the long term performance of a seaming technique, it is possible to use Practice D6389, using this test method to determine the anticipated strength reduction in the initial, short term wide-width tensile strength (Test Method D4595) results.

1.3 The values stated in either SI units or inch-pound units are to be regarded separately as standard. The values stated in each system may not be exact equivalents; therefore, each system shall be used independently of the other. Combining values from the two systems may result in non-conformance with the standard.

1.4 This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

Extracted, with permission, from ASTM D4884 Standard Test Method for Strength of Sewn or Bonded Seams of Geotextiles, copyright ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19482. A copy of the complete standard may be purchased from ASTM International, www.astm.org.