


WOOD CLEAVAGE TEST FIXTURE

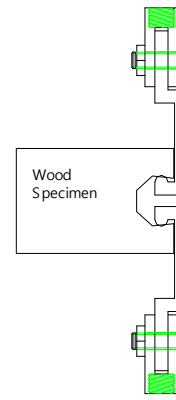

Model No. ASTM.D0143.20
Specimen Size or Difference Between Fixtures Up to 2" wide and up to 2" thick

Construction Stainless steel

Temperature -240 to 600°F (-152 to 318°C)

Specimen:	Length	Any length - 3" typical
Fixture:	Mounting	1/2"-20 threaded couplings
	Capacity	2,000 lbs (8.9 kN)
	Weight	12 lbs approximately
	Dimensions	Assembled - 2" x 2" x 10"
	Standard	Manufactured in compliance with ASTM D143

QUOTE

Model No. ASTM.D0143.20 - Wood Cleavage Test Fixture

The cleavage fixture is constructed of stainless steel and measures 1-7/8" wide with 1/8" radii at the loading points. The fixture is supplied with 1/2"-20 threaded couplings for adaption to your test machine. This fixture should be used with a universal joint in the load train. The cleavage test fixture is manufactured in compliance with ASTM D143.

ACCESSORIES

No accessories available for this fixture

SPARE PARTS

Please contact us for spare or replacement parts

COMMON SIZE ADAPTERS

Upper and Lower Mounting: 1/2"-20 Threaded Coupling

Model No. M01S21 - 1/2" Male Clevis to 1/2"-20 Threaded Stud

Model No. M02S21 - 5/8" Male Clevis to 1/2"-20 Threaded Stud

Model No. M03S21 - 1.25" Male Clevis to 1/2"-20 Threaded Stud

Model No. M12S21 - 12mm Male Clevis to 1/2"-20 Threaded Stud

Model No. S36S21 - 1"-14 to 1/2"-20 Threaded Step Stud

Model No. LN21 - 1/2"-20 Threaded Locking Nut with Knurled OD