



WOOD PARALLEL TO THE GRAIN TENSILE GRIP

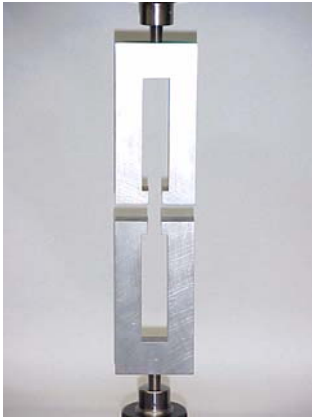

Model No.
ASTM.D0143.30

Specimen Size or Difference Between Fixtures
See below

Construction
Stainless Steel

Temperature
-240 to 600°F (-152 to 318°C)

Specimen:	Width	1.0" grip area, 0.3750" at gage section
	Thickness	1.0" grip area, 0.1875" at gage section
	Length	Any length - 18" typical
Fixture:	Mounting	1/2"-20 threaded couplings
	Capacity	5,000 lbs (22kN)
	Weight	8 lbs approximately
	Dimensions	Assembled - 3" x 1" x 22"
	Standard	Manufactured in compliance with ASTM D143

QUOTE

Model No. ASTM.D0143.30 - Wood Parallel to the Grain Tensile Grip

The grips are 3" wide by 1" thick by 6" long. The fixture is supplied with 1/2"-20 threaded couplings for mounting to your test machine. This fixture should be used with a universal joint in the load train. The Tension Parallel to Grain tensile grips are constructed of stainless steel. Manufactured in compliance with ASTM D143.

ACCESSORIES

No accessories available for this fixture

SPARE PARTS

Please contact us for spare or replacement parts

COMMON SIZE ADAPTERS

Upper and Lower Mounting: 1/2"-20 Threaded Coupling

Model No. M01S21 - 1/2" Male Clevis to 1/2"-20 Threaded Stud

Model No. M02S21 - 5/8" Male Clevis to 1/2"-20 Threaded Stud

Model No. M03S21 - 1.25" Male Clevis to 1/2"-20 Threaded Stud

Model No. M12S21 - 12mm Male Clevis to 1/2"-20 Threaded Stud

Model No. S36S21 - 1"-14 to 1/2"-20 Threaded Step Stud

Model No. LN21 - 1/2"-20 Threaded Locking Nut with Knurled OD