
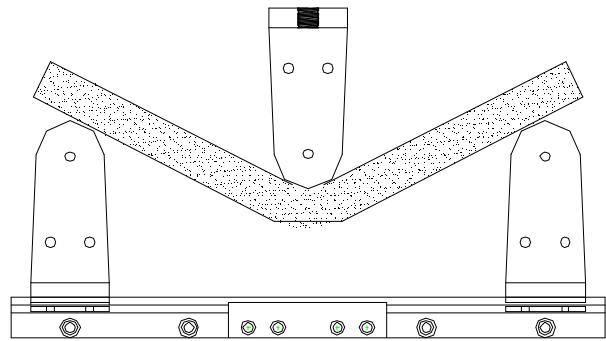


STATIC THREE POINT WOOD FLEXURE FIXTURE

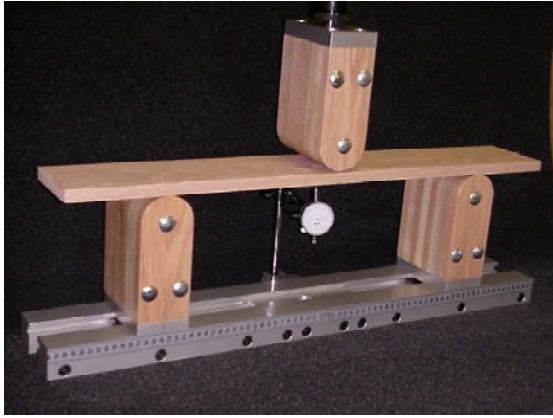

Model No.
ASTM.D1037.10

Specimen Size or Difference Between Fixtures
Up to 3" wide, 1" thick and 24" long

Construction
Wood and aluminum

Temperature
Ambient

Fixture:	Support Spans	Any span from 6" to 24"
	Loading Radii	1.75"
	Mounting	1"-14 threaded couplings
	Capacity	5,000 lbs (11 kN)
	Dimensions	Assembled - 4" x 24" x 24"
	Standard	Manufactured in compliance with ASTM D1037

QUOTE

Model No. ASTM.D1037.10 - Static Three Point Wood Flexure Fixture

The fixture is supplied with a base, (2) 8.75" tall wooden lower supports, and a wooden three point loading head. Includes a mid span displacement gauge with bracket. The supports are supplied with 1.75" radiused ends. The fixture has a 5,000 lbs capacity and is supplied with 1"-14 couplings for mounting purposes. The bend test fixture is manufactured in compliance with ASTM D1037.

ACCESSORIES

There are no accessories available for this fixture

SPARE PARTS

Please contact us for spare or replacement parts

COMMON SIZE ADAPTERS

Upper Mounting: 1"-14 Female Coupling

Model No. M03S36 - 1.25" Male Clevis to 1" -14 Threaded Stud

Model No. S42S36 - 1.25" -12 to 1" -14 Threaded Step Stud

Model No. S48S36 - 1.5" -12 to 1" -14 Threaded Step Stud

Model No. S60S36 - 2" -12 to 1" -14 Threaded Step Stud

Model No. LN36 - 1" -14 Threaded Locking Nut with Knurled OD