


FASTENER PULL-THROUGH TEST FIXTURE - PROCEDURE A

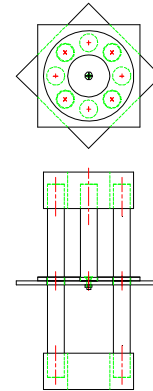

Model No.
ASTM.D7332.10

Specimen Size or Difference Between Fixtures
4.25" square and 0.055-0.230" thick

Construction
Stainless steel

Temperature
-240 to 600°F (-152 to 318°C)

Fixture:	Mounting	1"-14 couplings
	Capacity	20,000 lbs (88.9 kN)
	Weight	12 lbs approximately
	Dimensions	6" x 6" x 9" approximately
	Standard	Manufactured in compliance with ASTM D7332

QUOTE

Model No. ASTM.D7332.10 - Fastener Pull Through Test Fixture (Procedure A)

This test fixture for procedure A uses compression to put a tensile load on the fastener through the square plates. Fixture includes a base with 4 cylindrical supports, a top plate with 4 cylindrical supports and all hardware necessary. Supplied with 1"-14 threaded couplings for mounting. Temperature Range: -240 to 600°F (-152 to 318°C). Constructed of stainless steel and manufactured in compliance with ASTM D7332.

ACCESSORIES

No accessories available for this fixture

SPARE PARTS

Please contact us for spare or replacement parts

COMMON SIZE ADAPTERS

Upper and Lower Mounting: 1"14 Female Coupling

Model No. M03S36 - 1.25" Male Clevis to 1"-14 Threaded Stud

Model No. S42S36 - 1.25"-12 to 1"-14 Threaded Step Stud

Model No. S48S36 - 1.5"-12 to 1"-14 Threaded Step Stud

Model No. S60S36 - 2"-12 to 1"-14 Threaded Step Stud

Model No. LN36 - 1"-14 Threaded Locking Nut with Knurled OD