


## LONGITUDINAL TENSILE TEST FIXTURE ASSEMBLY FOR FIBERGLASS PIPE

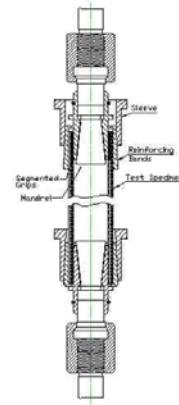

**Model No.**

ASTM.D2105.XXX.XXX

**Specimen Size or Difference Between Fixtures**

Up to 2.5" outer diameter

**Construction**

High strength steel

**Temperature**

-120 to 250°F (-85 to 122°C)

Fixture:	Mounting	1"-12 threaded studs and locking nuts
	Capacity	2,000 lbs
	Weight	10 lbs approximately
	Dimensions	Assembled 1.5" diameter x 15"
	Standard	Manufactured in compliance with ASTM D2105

## **QUOTE**

Model No. ASTM.D2105.XXX.XXX - Longitudinal Tensile Test Fixture Assembly For Fiberglass Pipe

Fixture includes sleeves and reinforcing bands for X.XXX" ID, X.XXX" OD. Each set of mandrels is used for a specific size pipe.

The fixture consists of a tapered mandrel that is fitted into a threaded coupling with threaded stud adapter. Supplied with 1"-12 threaded studs and locking nuts for mounting purposes. Manufactured of high strength steel with a protective black oxide finish in compliance with ASTM D2105.

## **ACCESSORIES**

Model No. ACC.D2105.10.XXX.XXX - A Set of Tapered Mandrels for ID X.XXX"

Model No. ACC.D2105.10.XXX.XXX - A Set of Sleeves and Reinforcing Bands for ID X.XXX"

## **SPARE PARTS**

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 0"-0.5" OD

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 0.5"-0.75" OD

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 0.75"-1" OD

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 1"-1.25" OD

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 1.25"-1.5" OD

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 1.5"-1.75" OD

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 1.75"-2" OD

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 2"-2.25" OD

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 2.25"-2.5" OD

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 2.25"-2.5" OD

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 2.5"-3" OD

ASTM.D2105.XXX.XXX - Longitudinal Fixture For Fiberglass Pipe Specimens 3"-4" OD

## **COMMON SIZE ADAPTERS**

### **Upper and Lower Mounting: 1"-12 Male Stud**

Model No. M03C35 - 1.25" Male Clevis to 1"-12 Threaded Coupling

Model No. S42C35 - 1.25"-12 to 1"-12 Threaded Reducer

Model No. S48C35 - 1.5"-12 to 1"-12 Threaded Reducer

Model No. S60C35 - 2"-12 to 1"-12 Threaded Reducer

Model No. LN35 - 1"-12 Threaded Locking Nut with Knurled OD

**EXTRA PHOTOS:**

